


# KDK - 10100 - D1 BASIC BUILDING DIMENSIONS CONCRETE SLAB - PLAN VIEW

NOTE: THESE DIMENSIONS ARE FOR BUILDING THE CHAMBER USING A 4" [10.2cm] THICK STRUCTURAL INSULATED PANEL. FOR OTHER TYPES OF CONSTRUCTION, OR A DIFFERENT WALL THICKNESS, THESE DIMENSIONS MAY NEED TO BE CHANGED TO KEEP THE CHAMBER INTERIOR DIMENSIONS THE SAME AS SHOWN.

THE INTERIOR HEIGHT OF THE KILN CHAMBER WILL BE 12' - 3 1/2" [3.747m]  
OVERALL ROOF HEIGHT WILL BE APPROXIMATELY 15' - 10 1/2" [4.839m]

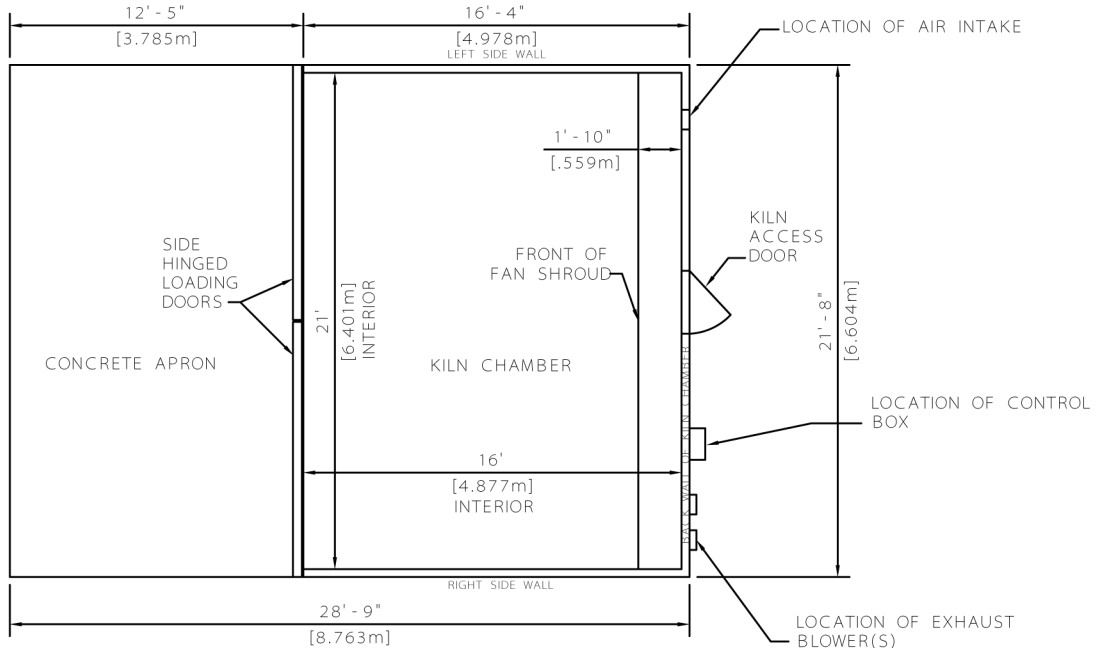

## NOTES:

1. CONCRETE: 4000 psi., USE RIVER GRAVEL, SURFACE MUST BE SMOOTH + OR - 1/8" [3.2mm]
2. THIS PLAN IS FOR BOTH STANDARD AND HIGH HORSEPOWER KILNS